
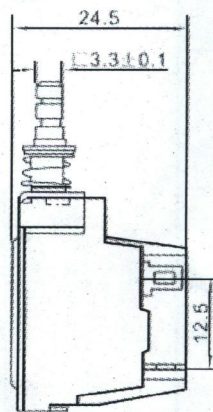


SHEET 1/1

**Elcon**

Copyright Elcon [India]. Unauthorised use and distribution of this document is strictly forbidden.

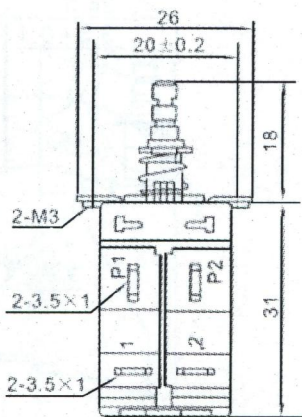

|                        |   |
|------------------------|---|
| 1. Travel Full         | 4.5mm   |
| Lock                   | 3.00mm  |
| 2. Rating              | AC 250 V 8A/128 A                                 |
| 3. Contact Resistance  | 100mΩ max.  |
| AT DC 5V 1A            |   |
| 4. Dielectric Strength | AC 2000 V   |
|                        | For 1 Minute, (T <sub>ML</sub> -T <sub>ML</sub> ) |
| 5. Operating Force     | 350 ± 100gf                                       |
| 6. Circuit             | DPST  |

PART NAME:-

EPS-3-22-W3AV

PREPARED BY

*MAHESH*

REVIEWED BY

*A.S. BISHI*

TOLERANCE

UP TO 10  $\pm 0.3$   
OVER 10 TO 100  $\pm 0.5$   
OVER 100  $\pm 1$

DATE

*26.07.11*

UNIT

MM

SCALE

N.T.S.

